


# PuIM-2P1M

Two Mini-PCIe and One M.2 Expansion Card Support the Wi-Fi or LTE Module, RoHS

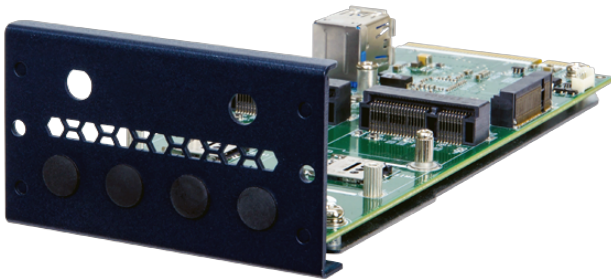

## Features

- » Supports 2 x PCIe mini and 1 x 2230/2242 M.2 B key
- » Mini PCIe and M.2 with SIM card slots
- » 2 PCIe 3.0 x4
- » RoHS compliant

## Specifications

| Physical Characteristics |   |
|--------------------------|---|
| Dimensions (LxWxH) (mm)  | 165.50 (L) x 77.8 (W) x 44.2 (H)  |
| Storage                  |   |
| Storage                  | M.2(NGFF) : 1 x M.2(NGFF) 3042/2260 M.2 B key (PCIe/USB2.0(for LTE)/USB3.0) |
| I/O Interface            |   |
| Expansion                | PCI Slot : 2 x mPCIe (PCIe/USB2.0)  |
| Wireless                 |   |
| SIM Slot                 | 4 x SIM card slot   |
| Environment              |   |
| Operating Temperature    | 0 ~ 40 °C   |
| Humidity                 | 5% ~ 90% RH, Non-condensing   |
| Card Slot Interface      |   |
| PCIe                     | 2 PCIe 3.0 x4   |
| Card Features            |   |
| Controller Chip          | ASM1812 (PCIe Gen2x4 )<br>FL1100EX (PCI-E To USB 3.0 (4 Port))              |

## Ordering Information

|               |   |
|---------------|---|
| PuIM-2P1M-R10 | Two Mini-PCIe and One M.2 Expansion Card Support the Wi-Fi or LTE Module. |
|---------------|---|

## Packing List

|                   |                              |
|-------------------|------------------------------|
| 1 x PuIM-2P1M-R10 | 1 x L-shaped T10 PuIM Wrench |
| 2 x Torx Screws   | 1 x QIG                      |