


# 63010-010600-010-RS

600 W PS/2 ATX Power Supply with ErP

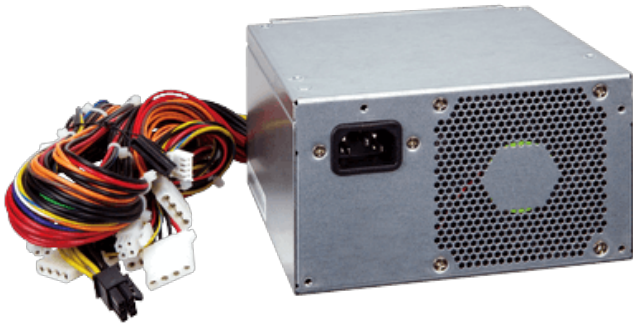

## Features

600 W PS/2 ATX Power Supply with ErP

## Specifications

| Input                    |   |
|--------------------------|---|
| Voltage                  | 90~264 VAC Full Range   |
| Frequency                | 47 Hz ~ 63 Hz   |
| Input Current            | 8A (RMS)@115VAC, 4A (RMS)@230VAC  |
| Inrush Current           | 40A max. for 115VAC, 80A max. for 230VAC  |
| Output                   |   |
| Voltage                  | +3.3V/25A,+5V/25A,+12V1/16A,+12V2/16A,+12V3/16A,+12V4/16A,-12V/0.5A,+5Vsb/4A,-5V/0.5A                     |
| Over Voltage Protection  | +3.3V: 3.9V-4.5V<br>+5V: 5.7V-6.5V<br>+12V1 ~ +12V4: 13.3V-16.7V  |
| Short Circuit Protection | +3.3V, +5V, +12V1, +12V2, +12V3, +12V4, 24V or -12V shutdown and latch off                                |
| General                  |   |
| Watt                     | 600   |
| Efficiency               | 82%   |
| MTBF                     | 100000  |
| Operating temperature    | 0°C ~ 50°C  |
| Storage temperature      | -20°C ~ 80°C  |
| Dimensions               | 140 x 150 x 86  |
| Output Connector         | 1 x 20+4-pin ATX,<br>2 x 4-pin 12V CPU,<br>9 x HDD/CDROM,<br>1 x Graphics card power,<br>2 x FDD,2 x SATA |

## Ordering Information

|                     |   |
|---------------------|---|
| 63010-010600-010-RS | PS/2 Power;FSP;FSP600-80PSA(SK);9PA6009824;Active PFC;Vin:90~264VAC;600W;150*140*86mm;;;meet 80plus(BRONZE);Vout:ATX;ATX;CCL;RoHS |
|---------------------|---|