


iM2-CAN-2P

M.2 B Key + M Key card supports 2-Port CAN Bus, RoHs

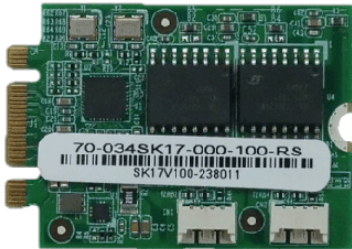

Features

- » M.2 B Key + M Key card supports 2 x Independent CAN ports
- » Up to 1 Mbps transmission speed
- » Support 16 MHz CAN controller frequency

Specifications

Form Factor	
Form Factor	M.2 B Key + M Key card
System	
Chipset	Fintek F81601 (PCIe to 2 CAN bus), Chipanalog CA-IS3062 (CAN Transceiver)
Physical Characteristics	
Dimensions (LxWxH) (mm)	30mm x 42mm
Net Weight	GW: 100g / NW: 50g
I/O Interface	
I/O Interface	2 x CAN-bus/OBD-II : CANBus 2.0 B
Environment	
Operating Temperature	0°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Humidity	5% ~ 95%, non-condensing
Certifications	
Safety & EMC	CE/FCC compliant
Card Slot Interface	
M.2	M.2 B/M key 3042 (PCIe gen3 x1 signal)

Ordering Information

iM2-CAN-2P-R10	M.2 B Key + M Key card (3042) supports 2-Port CAN Bus, RoHs
----------------	-------------------------------------------------------------

Packing List

1 x iM2-CAN-2P card	2 x D-SUB9 male cable
1 x QIG (Quick Installation Guide)	