


KINO-945GSE

Mini-ITX SBC with Intel® Atom™ N270 1.6GHz,

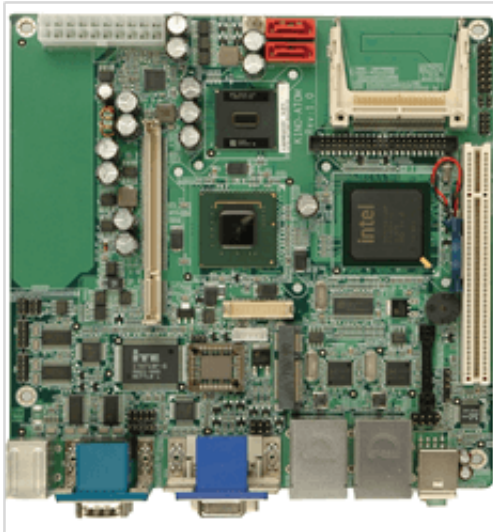

Features

- » Intel® Atom™ processor N270 1.6GHz with ultra low voltage fanless support
- » 400/533 MHz DDR2 SO-DIMM memory support up to 2 GB
- » Dual display supported by VGA + DVI-D, LVDS + VGA, LVDS + DVI-D
- » Support PCIe Mini slot and PCI slot for expansion
- » Support six USB 2.0, two SATA, four COM
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

| | |
|-------------------------|--|
| Display | Display |
| System | CPU |
| Chipset | Intel® 945GSE + ICH7M |
| Memory Max. | One 200-pin 400/533 MHz DDR2 SDRAM SODIMM supported (system max. 2 GB) |
| Storage | 1 x CF Type II 1 x IDE 1 x SATA 3Gb/s |
| CPU Socket | |
| I/O Interface | Ethernet |
| Digital I/O | 8-bit digital I/O (2x5 pin) |
| Audio | Realtek ALC655 AC'97 codec |
| I/O Interface | |
| Power | Power consumption |
| Environment | Operating Temperature |
| Humidity | 5% ~ 95%, non-condensing |
| Option | iRIS |
| Expansion Slots | Expansion Slots |
| FSB | FSB |
| Watchdog Timer | Watchdog Timer |
| CPU Cooler | CPU Cooler |
| I/O Interface | I/O Interface |
| 2 x Internal USB 2.0 | |
| 1 x Internal RS-422/485 | |
| 1 x Internal RS-232 | |
| 2 x RS-232 | |

Ordering Information

| | |
|-----------------------|--|
| KINO-945GSE-N270W-R12 | Mini-ITX SBC with Intel Atom N270 1.6GHz,VGA/DVI/HDTV,Dual PCIe GbE,USB2.0,SATA and Audio,-20~70 , R12 |
| KINO-945GSE-N270-R12 | Mini-ITX SBC with Intel Atom N270 1.6GHz,VGA/DVI/HDTV,Dual PCIe GbE,USB2.0,SATA and Audio,R12 |