


IEM-LX-800

AMD Geode™ LX 800 Highly Integrated ETX Module

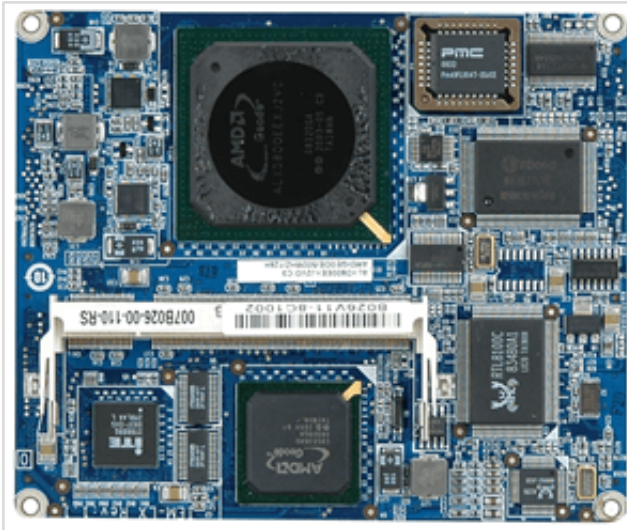

Features

AMD Geode™ LX 800 Highly Integrated ETX Module

Specifications

| | |
|----------------|--|
| System | CPU |
| Chipset | AMD Geode? LX 800 + AMD CS5536 |
| Memory Max. | One 200-pin 400/333 MHz DDR SDRAM SO-DIMM Supported (system max. 1GB) |
| I/O Interface | Ethernet |
| Digital I/O | N/A |
| Display | VGA integrated in AMD Geode? LX 800 24-bit TTL (optional) 18-bit single-channel LVDS |
| Audio | Realtek ALC203 AC'97 codec |
| Expansion | 4 x PCI bus master ISA support by ITE IT8888G |
| I/O Interface | 4 x USB 2.0 2 x RS-232 1 x IDE 1 x LPT/FDD 1 x PS/2 KB/MS |
| Power | Power consumption |
| Environment | Operating Temperature |
| Humidity | 5% ~ 95%, non-condensing |
| Watchdog Timer | Watchdog Timer |
| Super IO | Super IO |
| I/O Interface | I/O Interface |
| 1 x LPT | |
| 2 x RS-232 | |

Ordering Information

| | |
|----------------|--|
| IEM-LX-800-R11 | AMD LX800 500MHz processor,VGA/LVDS/TTL,LAN & Audio,RoHS |
|----------------|--|