


## AC-KIT2-888S

Realtek ALC888S 7.1 Channel HD Audio peripheral board, half size, RoHS

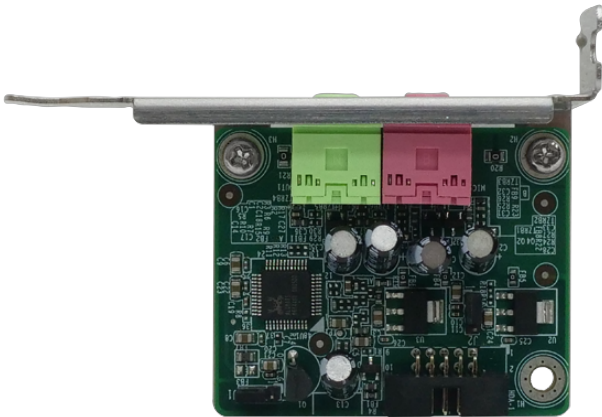

## Features

- » Realtek ALC888S HD Audio codec IC supported
- » Two audio jacks for mic in and line out
- » Driver supports Windows® 2000/2003/XP/Vista/7/10 (32/64 bits) and Linux (Ubuntu or Debian)

## Specifications

|                          |  |
|--------------------------|--|
| Physical Characteristics |  |
| Dimensions (LxWxH) (mm)  | 50mm x 40mm  |
| I/O Interface            |  |
| Audio                    | HD Audio : two audio jacks for mic in and line out |
| Environment              |  |
| Operating Temperature    | 0°C – 60°C   |
| Storage Temperature      | -30 – 70°C   |
| Humidity                 | 5% ~ 95%, non-condensing                           |
| Certifications           |  |
| Safety & EMC             | CE/FCC compliant                                   |

## Ordering Information

|                  |   |
|------------------|---|
| AC-KIT2-888S-R10 | Realtek ALC888S 7.1 Channel HD Audio peripheral board, small size, RoHS |
|------------------|---|

## Packing List

|   |                  |
|---|------------------|
| 1 x AC-KIT2-888S audio peripheral board | 1 x Audio cable  |
| 1 x QIG                                 | 1 x IO Shielding |