


IPCIE-UART-2D2P

PCIe card supports four RS-232/422/485 Port, RoHs

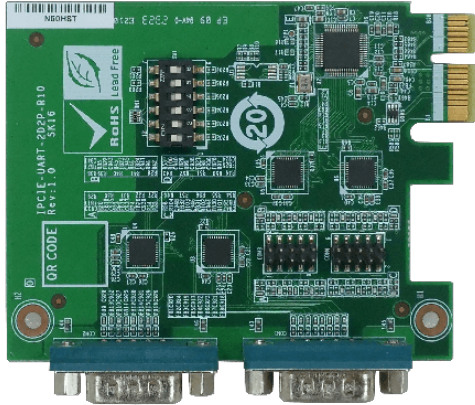

Features

- » PCIe card supports four RS-232/422/485 Port
- » 128 bytes transmit/receive FIFO
- » High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- » Baud rate supports 115.2K, max. up to 1.5M

Specifications

| | |
|--------------------------|--|
| Form Factor | |
| Form Factor | PCI Express® x1 |
| System | |
| Chipset | Fintek F81504 (PCI Express Bridge to Quad Serial Port), Fintek F81439 (Buffer/Transceiver Series) |
| Physical Characteristics | |
| Dimensions (LxWxH) (mm) | 70mm x 90mm |
| Net Weight | GW: 120g / NW: 80g |
| I/O Interface | |
| I/O Interface | 2 x External RS-232/422/485 : DB-9 2 x Internal RS-232/422/485 : pin header (2x5 pin, P=2.0) |
| Environment | |
| Operating Temperature | 0°C ~ 60°C |
| Storage Temperature | -30°C ~ 70°C |
| Humidity | 5% ~ 95%, non-condensing |
| Certifications | |
| Safety & EMC | CE/FCC compliant |

Ordering Information

| | |
|---------------------|---|
| IPCIE-UART-2D2P-R10 | PCIe x1 card supports 4-Port RS-232/422/485, RoHs |
|---------------------|---|

Packing List

| | |
|--------------------------|------------------------------------|
| 1 x IPCIE-UART-2D2P card | 1 x Half height bracket |
| 2 x D-SUB9 male cable | 1 x QIG (Quick Installation Guide) |