


電源供應器 &gt; PS/2 電源供應器

## ACE-A130B

300 W PS/2 ATX Power Supply with ErP

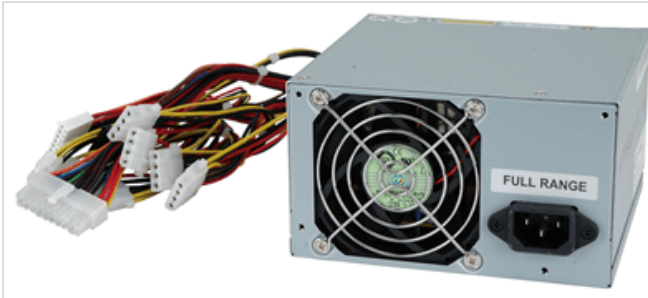

## Features

300 W PS/2 ATX Power Supply with ErP

## Specifications

General	
Dimensions	140 x 150 x 86
Efficiency	85%
MTBF	100,000
Operating temperature	-5°C ~ 50°C
Output Connector	1 x 20-pin ATX, 1 x 4-pin 12V CPU, 6 x HDD/CDROM, 1 x FDD, 1 x Extra +5V (P10), 2 x SATA
Storage temperature	-40°C ~ 70°C
Watt	300W
Input	
Voltage	90~264 VAC Full Range
Frequency	47 Hz ~ 63 Hz
Input Current	6A (RMS)@115VAC, 3A (RMS)@230VAC
Inrush Current	80A max. for 115VAC, 160A max. for 230VAC
Output	
Voltage	+3.3V/19A,+5V/16A,+12V1/17A,+12V2/17A,-12V/0.3A,+5Vsb/3A,-5V/0.2A
Over Voltage Protection	+3.3V: 3.7V-4.8V
	+5V: 5.7V-7.0V
	+12V1 and +12V2: 13.3V-16V
Short Circuit Protection	+3.3V, +5V, +12V or -12V shutdown and latch off

## Ordering Information

ACE-A130B-S-R10	300W PS/2 ATX Power Supply with ERP/PFC & on/off switch,CCL;RoHS
ACE-A130B-R10	300W PS/2 ATX Power Supply with ERP& PFC,CCL;RoHS